

USE AND SYSTEM ACTIVATION

Dispenser works in **behind the bar** mode (no wine card).



SERVICE TEMPERATURES

Controlled temperature from **5° to 18°C** (41° to 65°F).



DOSAGES

Up to three different dosage through capacitive touch keys.




REFRIGERATION SYSTEM

Use of modern **no-frost** professional cooling system.



GAS

Nitrogen or food grade **Argon** (cylinder or generator not included).



LED ILLUMINATION

Intelligent led system with energy saver.



SAFETY


The dispenser comes with a key lock.



FLEX TECHNOLOGY

Thanks to the flex technology, it is possible for the machine to act as a Quattro or as a Due+2*.

SPACE REQUIREMENTS

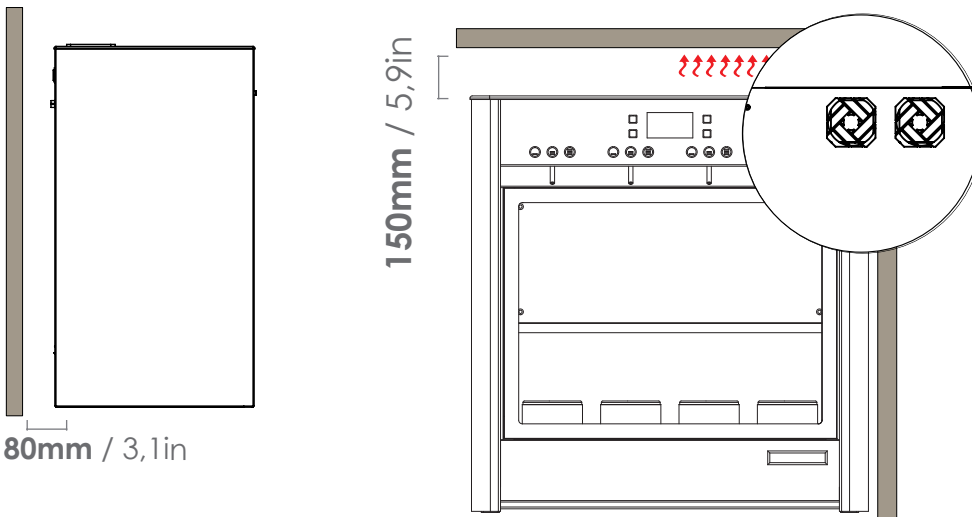

US PLUG SPECS


*Optional

NEMA RECEPTACLE 5-15r



TECHNICAL SPECIFICATIONS

WIDTH	550mm 21,65in
HEIGHT	579mm 22,79in
DEPTH	320mm 12.59in
WEIGHT CT	45kg 99lbs

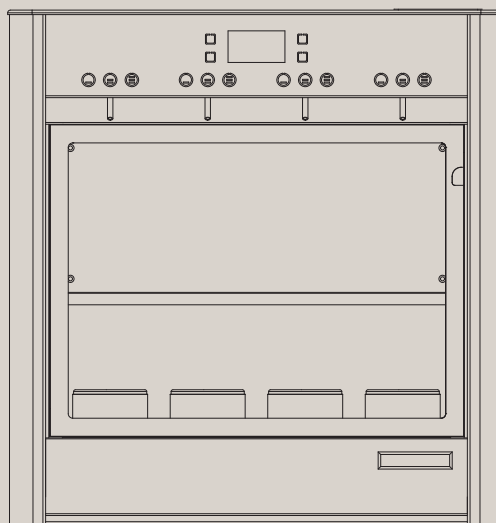

MODELS

DISPENSER	ORDER CODE	REFRIGERATION	ELECTRICAL REQUIREMENTS
QUATTRO R T - US & CANADA	S204200323201	NONE	100-240VAC 50/60HZ
QUATTRO- US & CANADA	S204223323201	ONE TEMPERATURE	110VAC 60Hz - 2,0A
DUE + 2 - US & CANADA	S204B23323151	DUAL TEMPERATURE	110VAC 60Hz - 2,2A
QUATTRO R T - EU/WORLD	S204200333101	NONE	100-240VAC 50/60HZ
QUATTRO - EU/WORLD	S204233333301	ONE TEMPERATURE	220VAC 50Hz - 1,0A
DUE + 2 - EU/WORLD	S204B33333351	DUAL TEMPERATURE	220VAC 50Hz - 1,1A

CERTIFICATIONS

USA & CANADA 110VAC 60Hz

NSF 25
UL 751
UL 541
CSA C22.2 #128



EUROPE & WORLD 220VAC 50Hz

NSF 25
IEC 60335-1
IEC 60335-2-75
IEC 60335-2-24

