



**USE AND ACTIVATION SYSTEM** Dispenser works in behind the bar mode (no wine card) or self service with wine card (chip



SERVICE TEMPERATURES

or RFID\*) or barcode reader\*.

Fully independent zones ranging from 6°C to 22°C.



DOSAGES Up to three different dosage through high quality mechanical buttons.



SOFTWARE CONNECTION Connection between modules and software through LAN wire and WI/FI\*




**BOTTLES LIFTING SYSTEM** Lifting system with pneumatic pistons.

with TCP/IP protocol.



WINE CARD Chip or RFID\* cards.

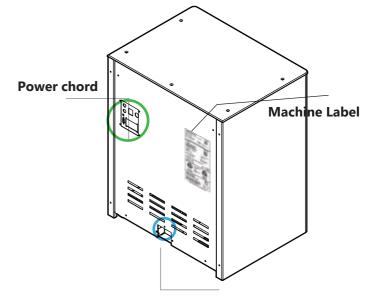





**REFRIGERATION SYSTEM** Use of modern no-frost, noiseless professional cooling system.



GAS Nitrogen or food grade Argon (cylinder or generator not included).



**CUSTOMIZATIONS** Machine color can be customized, Front panel can be silkscreened\*



LED ILLUMINATION Intelligent led RGB system for an infinite variety of color combinations.



Automatic lock activated by Smart Card or RFID\*.



**ANTI CONDENSATION GLASS** 


Glass doors are treated with a special coating that prevents condensation.


\*Optional

## DIMENSIONS

<b>528mm  </b> 20 <sup>13</sup> / <sub>16</sub> "
<b>632mm  </b> 24 <sup>7</sup> / <sub>8</sub> "
<b>398mm  </b> 15 <sup>11</sup> / <sub>16</sub> "
<b>42kg</b>   92.5lbs

## SPACE REQUIREMENTS









CERTIFICATIONS

USA & CANADA 110VAC 60Hz

**NSF 25** UL 751 UL 541 Intertek 4007521 CSA C22.2 #128 Intertek



## EUROPE & WORLD 220VAC 50Hz

**NSF 25** CE IEC 60335-1 IEC 60335-2-75 IEC 60335-2-24



MADE IN ITAKY

