

SERVICE TEMPERATURES

Dual zone ranging from 6°C to 22°C.
Without the divider from 15°C to 22°C



DOSAGES

Up to three different dosage through
high quality mechanical buttons.



BOTTLES LIFTING SYSTEM

Lifting system with manual
gas spring pistons.



REFRIGERATION SYSTEM

Use of modern no-frost, noiseless
professional cooling system.




GAS

Nitrogen or food grade Argon
(cylinder or generator not included).



CUSTOMIZATIONS

Machine color can be customized,
Front panel can be silkscreened*



LED ILLUMINATION

Intelligent led system with power
saving features.



LOCKING SYSTEM

Automatic lock activated by Menu
button





ANTI CONDENSATION GLASS

Glass doors are treated with a
special coating that prevents
condensation .

*Optional

SPACE REQUIREMENTS

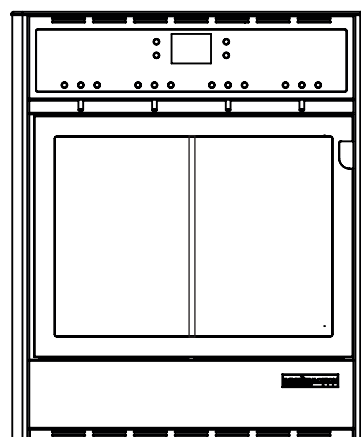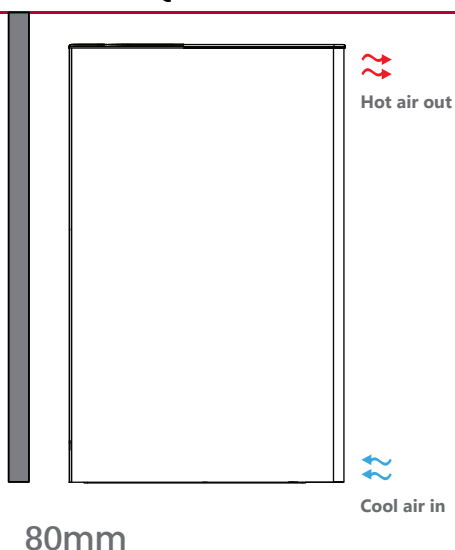

DIMENSIONS

| | |
|--------|---|
| WIDTH | 527,27mm 20 ¹³ / ₁₆ " |
| HEIGHT | 632mm 24 ⁷ / ₈ " |
| DEPTH | 398mm 15 ¹¹ / ₁₆ " |
| WEIGHT | 41kg 90.5lbs |



Temperature Combinations



CERTIFICATIONS

USA & CANADA 110VAC 60Hz

NSF 25
UL 751
UL 541
CSA C22.2 #128



EUROPE & WORLD 220VAC 50Hz

NSF 25
IEC 60335-1
IEC 60335-2-75
IEC 60335-2-24

